


60227 IEC 01 THW

450/750 V SOLID AND STRANDED CONDUCTOR PVC INSULATED, SINGLE CORE

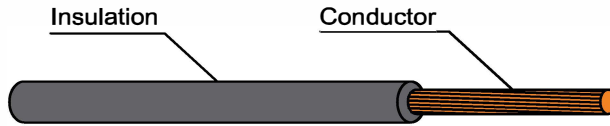

CABLE STRUCTURE

Conductor : Solid and stranded SIZE 1.5 mm² up to 400 mm²

Insulation : Polyvinyl chloride (PVC/C)

Core identification : Single core : any color

TECHNICAL DATA

Classification : Maximum conductor temperature 70 °C
Circuit voltage not exceeding 450/750 volts

Rated voltage : 450 Volts between Line to Earth
: 750 Volts between Line to Line

Testing voltage : 2,500 Volts

Reference standard : TIS 11 Part 3-2553, Table1

APPLICATION

- ใช้งานทั่วไป
- เดินในช่องเดินสายและต้องป้องกันหน้าเข้าช่องเดินสาย
- ห้ามร้อยท่อฝังดินหรือฝังดินโดยตรง

Building wiring for installation on insulator or in raceway dry location

<u>Size(mm²)</u>	<u>Baht/m. (บาท/เมตร)</u>
1.5	11.48
2.5	17.50
4	27.60
6	42.00
10	69.02
16	109.70
25	172.60
35	250.50
50	330.00
70	470.00
95	649.50
120	821.74
150	1,017.10
185	1,272.00
240	1,679.14
300	2,084.50
400	2,665.54